

# SERIES

# JF25.38Q





Miniature series



- The cable chain tested service life is up to 20 million times.
- The ledge of cable chain is able to open to inspect or replace cable.
- The cable chain can be mounted separator and cross separator to divide space and effectively protect cables. (See accessories table)
- The inclined "X" type connector can be mounted pectinate plate to fix cable. (See accessories table)
- The cable chain is suitable for a diameter of 22mm or less of cable.

### Basic technical data

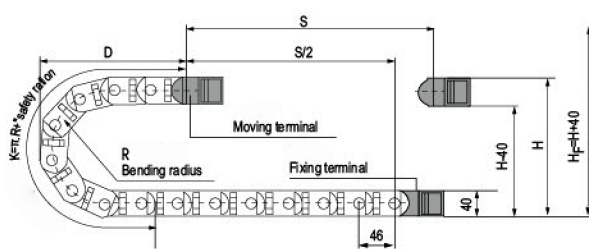

Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	55	63	75	100	125	150	225
H	150	166	190	240	290	340	490
D	121	129	141	166	191	216	291
K	276	322	368	414	506	598	828


Actual mounting height: H<sub>f</sub>=H+40mm(load 1.0kg/m)

Drawing



Series No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters						
							(mm)hole distance						No.
							A	B	C	D	E	F	
JF25.38Q	25	38	40	58	Q	75	16	51	16	10	69	JF25.38Q	
JF25.57Q	25	57	40	77	Q	75	16	72	16	10	81	JF25.57Q	

### Fix bracket type and parameters

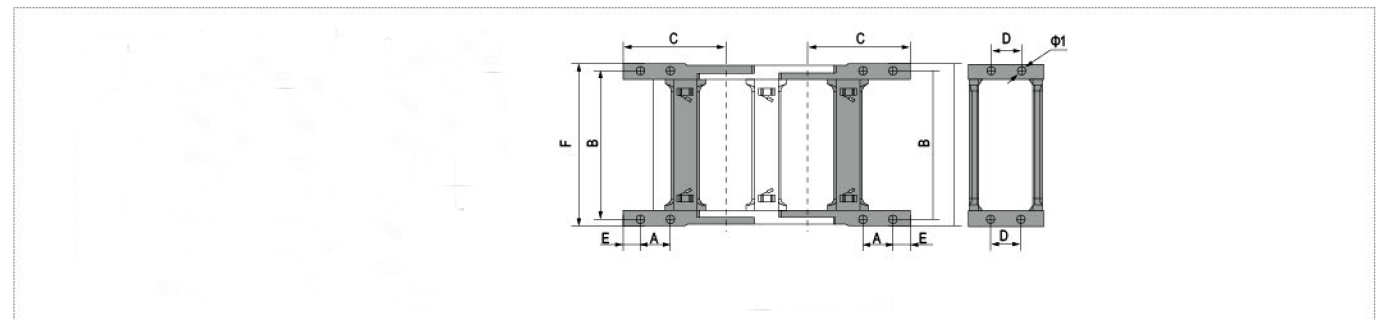

### Order Sample

(Sample: inner height 25mm, inner width 38mm, radius 55mm, length 22 links/1 meter)

Note: Various sizes can be customized according to customer requirements.



MADE IN TURKEY