

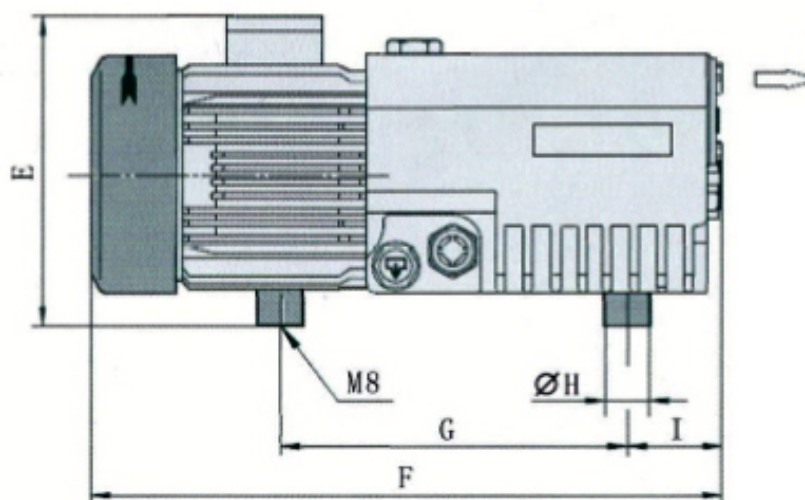


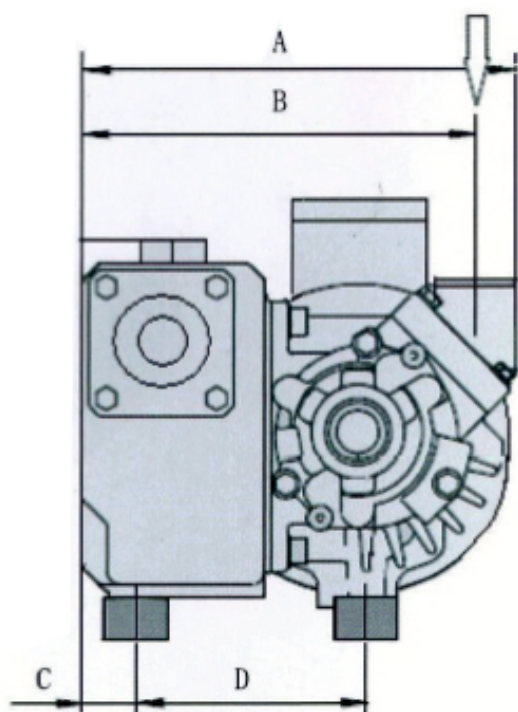

Mounting and overall dimensions

Dimensions	A	B	C	D	E	F	G	H	I
SVR-10 SVR-21	232	213	26	130	220	480	226	30	117
SVR-10 SVR-20	232	213	26	130	220	465	210	30	117
SVR-21	232	213	26	130	220	473	215	30	117
SVR-25	232	213	26	130	220	473	224	30	117
SVR-25	232	213	26	130	220	480	235	30	117

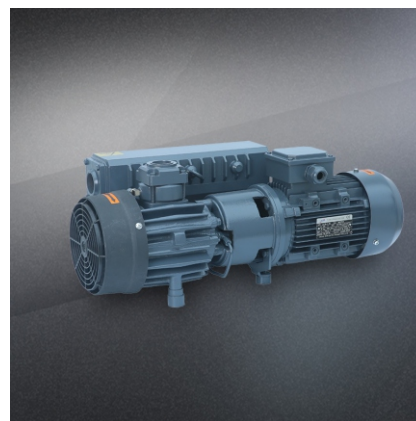

SVR-10/20/21/25

SVR-10/20/21/25 Technical parameter for single-stage rotary vane vacuum pump

ITEMS \ MODEL	Units	SVR-10	SVR-20	SVR-21	SVR-25
Rated Speed	m ³ /h	10	20	21	25
Utmost Pressure	mbar	0.1-0.5	0.1-0.5	0.1-0.5	0.1-0.5
Noise	dB(A)	61	62	62	62
Work temperature	°C	81	82	82	82
Oil consumption	L	0.5	0.5	0.5	0.5
Vapor permitted pressure	mbar	40	40	40	40
Suction rate of vapour	kg/h	0.15	0.3	0.3	0.4
Whorl of inlet	inch	Rp ³ / ₄ "	Rp ³ / ₄ "	Rp ³ / ₄ "	Rp ³ / ₄ "
Motor rated power	kW	0.37	0.75	0.75	0.9
Motor rated rotating speed	rpm	1440	2880	2880	2880
Total weight	kg	17	17	18	19

We won't notice the changes of our technical specifications under normal circumstances.

SVR-10/20/21/25

SVR-10/20/21/25 Single-stage rotary vane vacuum pump

www.tajhizvac.com