


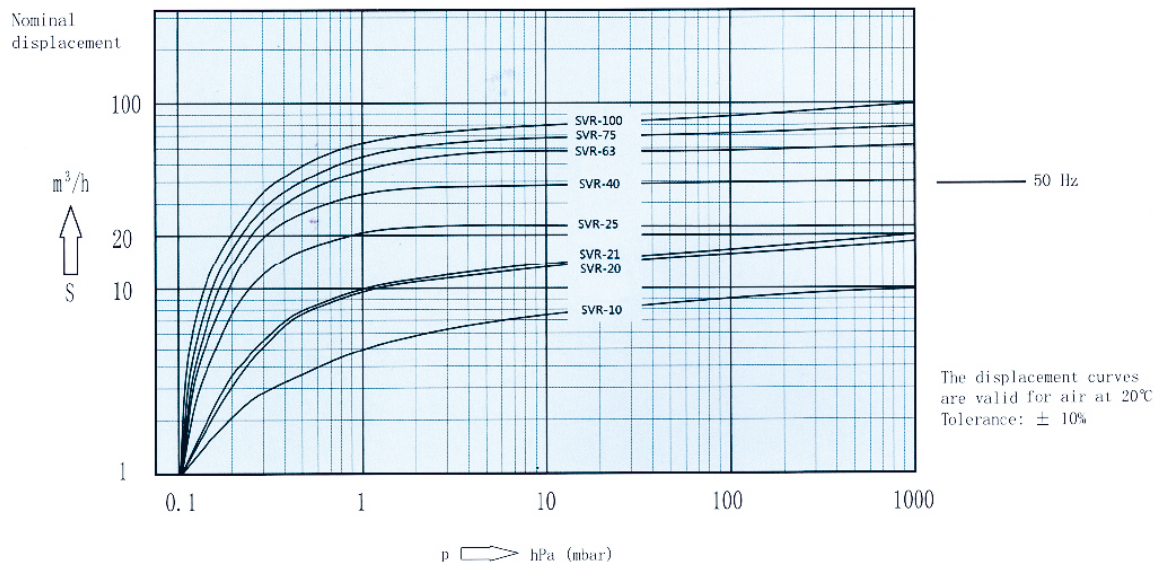


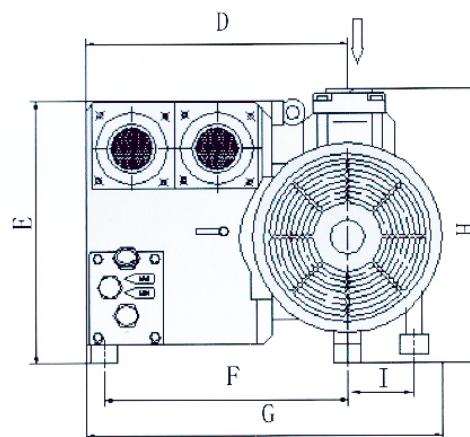

⊙ Mounting Dimensions

尺寸 Dimensions	A	B	C	D	E	F	G	H	I
SVR-40	650	150	290	195	270	185	300	280	55
SVR-63	650	150	265	295	285	278	430	295	—
SVR-75	670	160	280	295	285	278	430	295	—
SVR-100	720	180	295	295	285	278	430	295	—

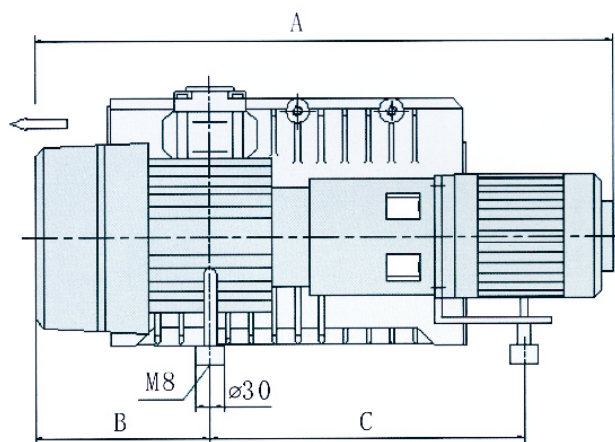

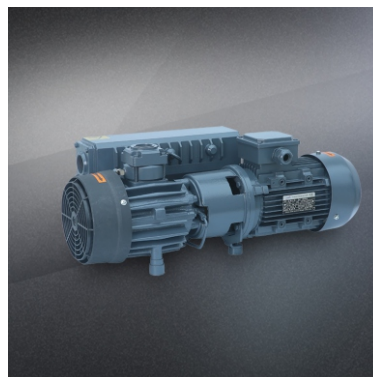

SVR-40/63/100

SVR-40/63/100 Technical parameter for single-stage rotary vacuum pump

ITEMS \ MODEL	Units	SVR-40	SVR-63	SVR-75	SVR-100
Rated Speed	m ³ /h	40	63	75	100
Utmost Pressure	mbar	0.1-0.5	0.1-0.5	0.1-0.5	0.1-0.5
Noise	dB(A)	64	65	65	66
Work temperature	°C	83	84	84	85
oil consumption	L	1.5	2	2	2
Vapor permitted pressure	mbar	40	40	40	40
Suction rate of vapour	kg/h	0.6	1	1.2	1.6
Whorl of inlet	inch	Rp1¼"	Rp1¼"	Rp1¼"	Rp1¼"
Whorl of outlet	inch	Rp1¼"	Rp1¼"	Rp1¼"	Rp1¼"
Motor rated power	kW	1.1	1.5	1.5	2.2
Motor rated rotating speed	rpm	1440	1440	1440	1440
Total weight	kg	48	58	60	72
Vacuum pump size	cm	65 × 30 × 28	65 × 43 × 29.5	67 × 43 × 29.5	72 × 43 × 29.5

We won't notice the changes of our technical specifications under normal circumstances.