




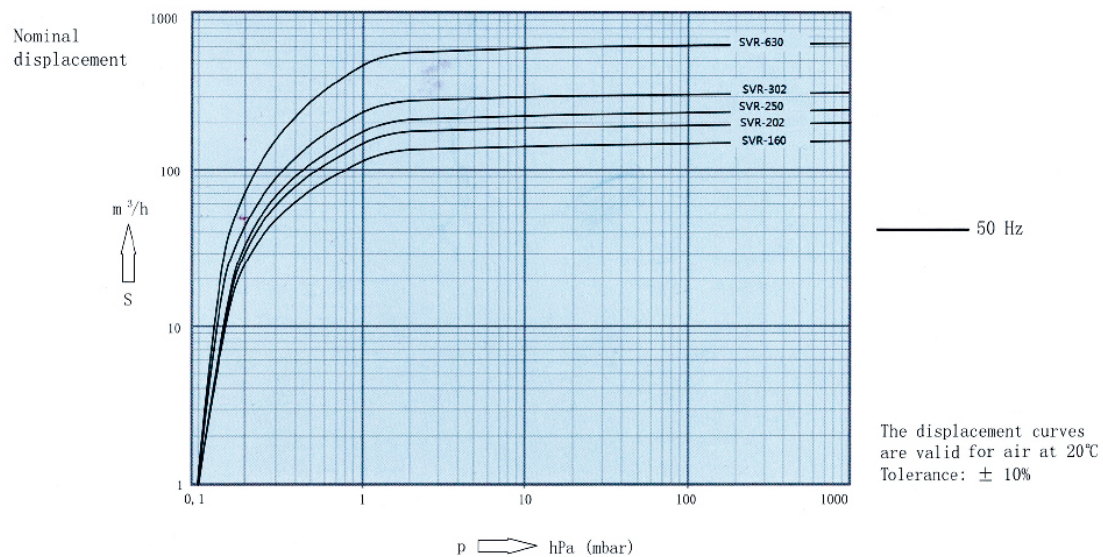

Mounting Dimensions

Dimensions	A	B	C	D	E	F	G	H	I
SVR-160	855	225	40	240	430	495	345	435	310
SVR-202	855	225	40	240	430	495	345	435	310
SVR-250	980	260	—	300	390	560	385	440	355
SVR-302	1010	260	—	300	390	560	385	440	355

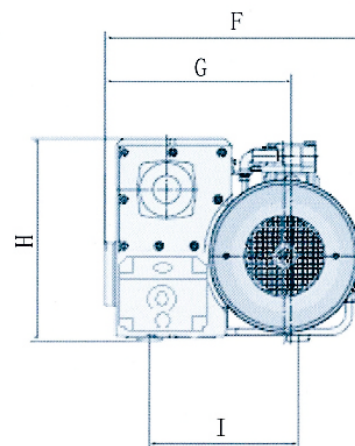

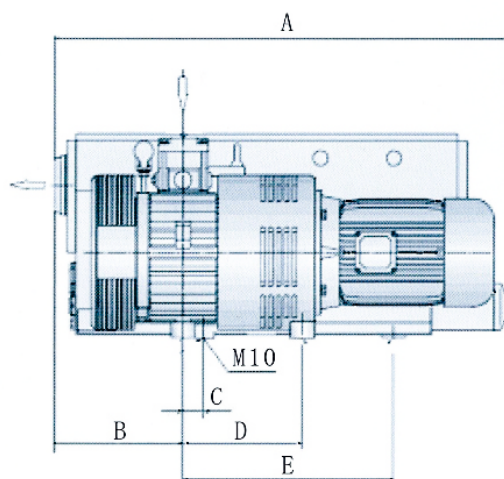

SVR-160/202/250/302

SVR-160/202/250/302 Technical parameter for single-stage rotary vane vacuum pump

ITEMS \ MODEL	Units	SVR-160	SVR-202	SVR-250	SVR-302
Rated Speed	m ³ /h	160	200	250	300
Utmost Pressure	mbar	0.1-0.5	0.1-0.5	0.1-0.5	0.1-0.5
Noise	dB(A)	71	73	73	75
Work temperature	°C	65	72	81	83
Oil consumption	L	5	5	8	8
Vapor permitted pressure	mbar	40	40	40	40
Suction rate of vapour	kg/h	2.5	4	4.5	5
Whorl of inlet	inch	Rp2"	Rp2"	Rp2"	Rp2"
Whorl of outlet	inch	Rp2"	Rp2"	Rp2"	Rp2"
Motor rated power	kW	4	4.8	5.5	7.5
Motor rated rotating speed	rpm	1440	1440	1440	1440
Total weight	kg	157	157	195	211
Vacuum pump size	cm	85.5×49.5×43.5	85.5×49.5×43.5	98×56×44	101×56×44

We won't notice the changes of our technical specifications under normal circumstances.