


Pump type GP-GP/M 300E



- 1 Suction
- 2 Discharge
- 3 Oil discharge plug
- 4 Oil sight glass
- 5 Oil fill up plug

Model	Dimension(mm)															
	A	B	C	D	E	F	G	H	L	M	O	P	Q	R	S	T
GP-GP/M 300E	974	410	507	397	25	399	146	316	56	253	166	89	290	55	389	78

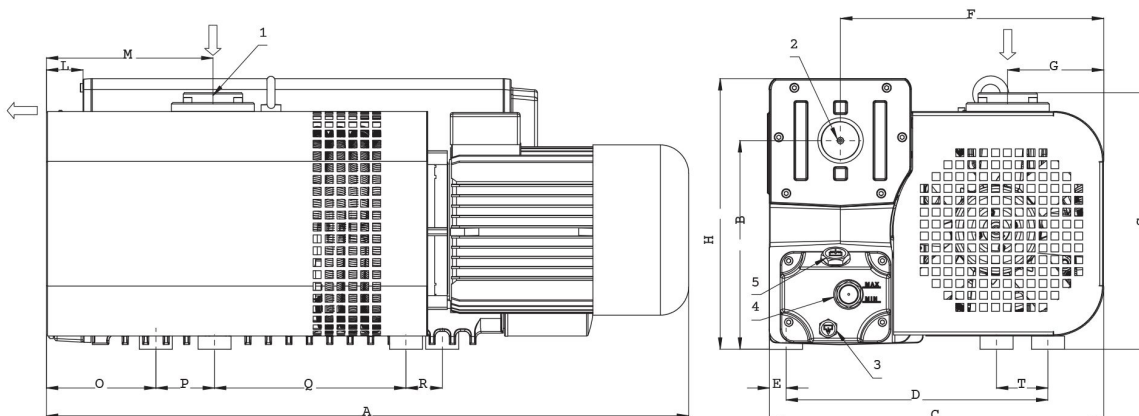

GENERAL EUROPE VACUUM  
GP/GPM300E Z Series

		<i>Pump type/Frequency</i>			
		GP 300E 50Hz	GP 300E 60Hz	GP/M 300E 50Hz	GP/M 300E 60Hz
Displacement	m3/h	300	360	300	360
Ultimate vacuum	mbar	5	5	0,1	0,1
Noise level without gas ballast	db (A)	70	74	70	74
Ultimate vacuum with gas ballast	mbar	10	10	0,8	0,8
Max water vapour quantity acceptable with gas ballast	kg/h	12	14,4	12	14,4
Standard voltage	v	230/400	460	230/400	460
Motor power	kW	7,5	7,5	7,5	7,5
R.P.M	g/1'	1450	1750	1450	1750
Weight with oil	kg	200	200	200	200
Oil quantity	l	6,5	6,5	6,5	6,5
Inlet connection		2" GAS	2" GAS	2" GAS	2" GAS
outlet connection		2" GAS	2" GAS	2" GAS	2" GAS